




**WI-PS311G-24V**  
**8GE+3GE Ports 24V**  
**PoE Switch with 8-Port PoE**  
**Data sheet**

## Highlights

- 8GE+3GE uplink Full Giga 24V Passive PoE Switch with 8Port PoE
- Supports PoE power up to 24W for each port
- Supports 24V Passive PoE compliant PDs
- External power adapter supply 120W output power
- 4K entry MAC address table with auto-learning and auto-aging

## Typical Applications

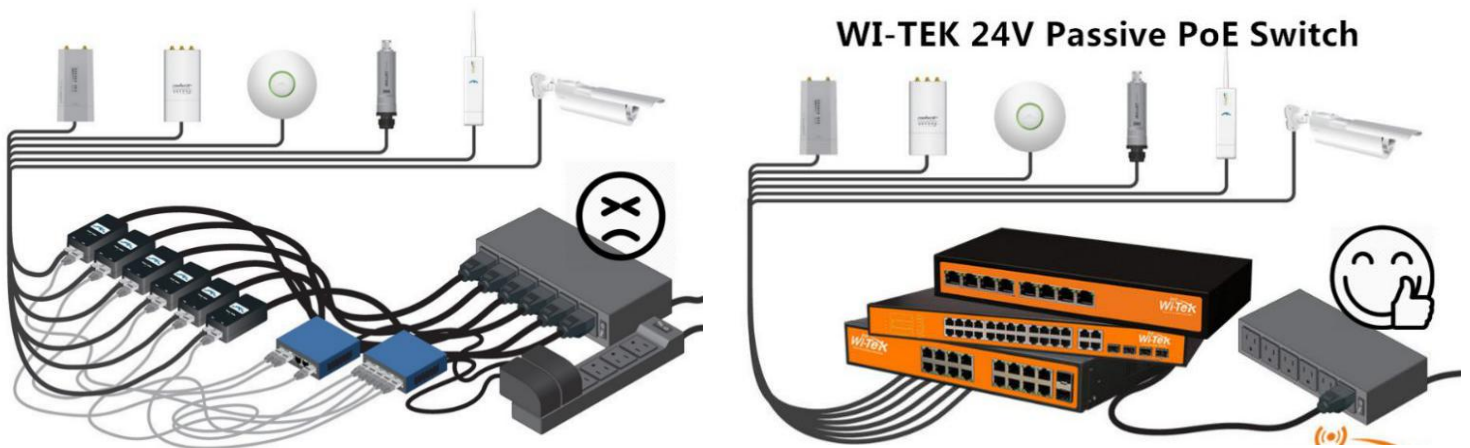

## Description

### what this product does

WI-PS311G-24V is a 11GE Ports unmanaged switch that requires no configuration and provides 8 PoE Ports. The 11-Ports desktop switch provides an easy way to expand your wired network. All 11 ports support auto-MDI/MDIX, eliminating the need to worry

about the type of cable to use. Featuring full duplex mode, the WI-PS311G-24V can process data at a rate of up to 2000Mbps making it an ideal choice for expanding your high performance wired network. Moreover, with innovative energy-efficient technology, the WI-PS311G-24V can save up to 68% of power consumption, making it an eco-friendly solution for your home or office network.

## High Performance

WI-PS311G-24V Fast Ethernet Switch provides 11 10/100/1000Mbps Auto-Negotiation RJ45 ports. All ports support Auto MDI/MDIX function, eliminating the need for crossover cables or Uplink ports. Featuring non-blocking switching architecture, WI-PS311G-24V forwards and filters packets at full wire-speed for maximum throughput. With 10K Jumbo frame, the performance of large files transfers is improved significantly. And IEEE 802.3x flow control for Full Duplex mode and backpressure for Half Duplex mode alleviate the traffic congestion and make WI-PS311G-24V work reliably.

## Easy to Use

The auto features of this Ethernet switch make installation plug and play and hassle-free. No configuring is required. Auto MDI/MDIX eliminates the need for crossover cables. Auto-negotiation on each port senses the link speed of a network device (10, 100, 1000Mbps) and intelligently adjusts for compatibility and optimal performance.

## Specifications

HARDWARE FEATURES	
Interface	11 100/1000Mbps RJ45 Ports

## HARDWARE FEATURES

<b>Network Media</b>	10/100/1000BASE-TX: UTP category 5 or better (maximum 100m)
<b>Fan Quantity</b>	Fanless
<b>Power Consumption</b>	120W (max. with PoE device connected)
<b>External Power Supply</b>	External Power Adapter(Output: DC24V / 5A)
<b>PoE Ports (RJ45)</b>	PoE PIN: 4,5+ 7,8- PoE Ports: Port1- Port8 Power Supply: 120W
<b>Backbound Bandwidth</b>	22Gbps
<b>Mac Address Table</b>	4K
<b>Packet Forwarding Rate</b>	16.4Mpps
<b>Buffer</b>	1.5Mbps
<b>Jumbo Frame</b>	10240Bytes
<b>Dimensions</b>	136*66*32 mm(L*W*H)

SOFTWARE FEATURES	
<b>Transmission Method</b>	Store-And-Forward
<b>Advanced Functions</b>	Priority Function Mac Address Auto-Learning And Auto-Aging Store and forward IEEE 802.3x flow control for Full-duplex Mode Backpressure for Half-duplex Mode

OTHERS	
<b>Certification</b>	CE, FCC, RoHS
<b>Package Contents</b>	POE Switch Electric Line Guide Book/Warranty Card
<b>Environment</b>	Operating Temperature: -10°C~55°C