



**WI-PMS310GF**  
**8GE+2SFP Ports 48V L2**  
**Managed PoE Switch**  
**with 8-Port PoE Datasheet**




# Highlights

- 8GE+2SFP Full Gigabit Switch with 8 PoE
- Internal power adapter supply 150W
- L2/L3/L4 QoS and IGMP snooping optimize voice and video application
- Support STP/RSTP
- Up to 4K QVLANS simultaneously
- Link Aggregation Control Protocol (LACP)
- WEB/CLI managed modes, SNMP, bring abundant management features



## Typical Applications

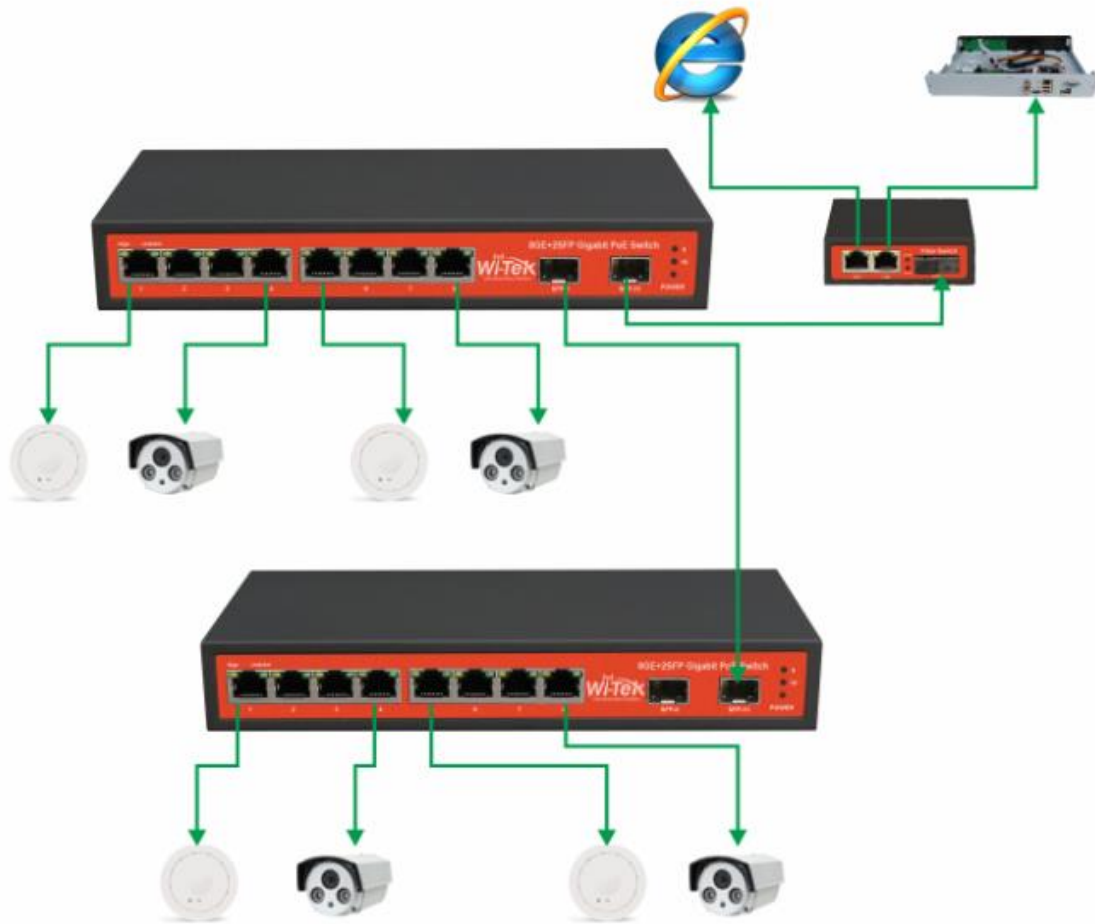

## Description

### What This Product Does

8 gigabit L2 managed switch WI-PMS310GF provides 8 10/100/1000Mbps ports. The switch provides high performance, enterprise-level QoS, advanced security strategies and rich layer 2 management features. Moreover, the switch also comes equipped with 2 gigabit SFP slots, expanding your network flexibly. WI-PMS310GF is the cost-effective network solution for the ideal small and medium business.

WI-PMS310GF has robust security and management features. The IP-MAC-Port-VID

Binding and Access Control List (ACL) functions protect against broadcast storms, ARP and Denial-of-Service(DoS) attacks, etc. Quality of Service (QoS, L2 to L4) provides enhanced traffic management capabilities to move your data smoother and faster. Anymore, the easy-to-use web management interfaces, along with CLI, SNMP, mean faster setup and configuration with less downtime. For workgroup and departments requiring cost-sensitive Layer 2 Switch and gigabit capability, Wi-Tek L2 managed Switch WI-PMS310GF provides you the ideal access-edge solution.

## **Secure Networking**

Wi-Tek this WI-PMS310GF provides IP-MAC-Port-VID Binding, Port Security, Storm control and DHCP Snooping which protect against broadcast storms, ARP attacks, etc. It integrates some typical DoS attacks to select. You can protect these attacks more easily ever than before. In addition, the Access Control Lists (ACL, L2 to L4) feature restricts access to sensitive network resources by denying packets based on source and destination MAC address, IP address, TCP/UDP ports and even VLAN ID. Moreover, the switch supports 802.1X authentication, which is used in conjunction with a RADIUS server to require some authentication information before access to the network is allowed.

## **Advanced QoS features**

To integrate voice, data and video service on one network, the switch applies rich QoS policies. Administrator can designate the priority of the traffic based on a variety of means including IP or MAC address, TCP or UDP port number, etc, to ensure that voice and video are always clear, smooth and jitter free.

## Abundant Layer 2 features

For more application of layer 2 switches, WI-PMS310GF supports a complete lineup of layer 2 features, including 802.1Q tag VLAN, Port Isolation, Port Mirroring, STP/RSTP, Link Aggregation Control Protocol and 802.3x Flow Control function. Any more, the switch provides advanced features for network maintenance. Such as Loop Back Detection, Cable Diagnostics and IGMP Snooping. IGMP snooping ensures the switch intelligently forward the multicast stream only to the appropriate subscribers while IGMP throttling & filtering restrict each subscriber on a port level to prevent unauthorized multicast access.

## Specifications

### HARDWARE FEATURES

Interface	8 10/100/1000Mbps RJ45 Ports (Auto Negotiation/Auto MDI/MDIX) 2 1000Mbps SFP Slots 1 Console Port
Network Media	10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) 100BASE-TX/1000Base-T: UTP category 5, 5e, 6 or above cable (maximum 100m) 1000BASE-X: MMF, SMF 1000Base-L X:62.5µm/50µm MM(2m~550m) or 10µm SMF(2m~5000m)
Fan Quantity	Fanless
Power Consumption	150W (max. with PoE device connected)

## HARDWARE FEATURES

External Power Supply	DC 52V 2.8A AC 110~265V 50/60HZ
PoE Ports (RJ45)	Standard: 802.3 af/at compliant PoE Ports: Port1- Port8 Power Supply: 150W
Exchange Capacity	20G
Packet Forwarding Rate	14.9Mpps
Mac Address Table	8K
Packet Buffer Memory	4Mb
Jumbo Frame	10240 Bytes
Dimensions	Product Size: 225mm* 105mm*32mm (L*W*H)

## SOFTWARE FEATURES

Quality of Service	Support 802.1p CoS/DSCP priority Support 4 priority queues
--------------------	---

## SOFTWARE FEATURES

	<p>Queue scheduling: SP, WRR, SP+WRR</p> <p>Port/Flow- based Rate Limiting</p>
L2 Features	<p>IGMP Snooping V1/V2/V3</p> <p>802.3ad LACP (Up to 8 aggregation groups, containing 8 ports per group)</p> <p>Spanning Tree</p> <p>STP/RSTP/MSTP</p> <p>Port isolation</p> <p>BPDU filtering/guard</p> <p>TC/Root protect</p> <p>Loop back detection</p> <p>802.3x Flow Control</p>
VLAN	<p>Supports up to 4K VLANs simultaneously (out of 4K VLAN IDs)</p> <p>Port/ MAC/Protocol-based VLAN</p> <p>Management VLAN configuration</p>
Access Control List	<p>L2~L4 package filtering based on source and destination MAC address, IP address, TCP/UDP ports, 802.1p, DSCP, protocol and VLAN ID;</p> <p>Time Range Based</p>
Security	<p>IP-MAC-Port-VID Binding</p> <p>IEEE 802.1X Port/MAC Based authentication, Radius, Guest VLAN</p> <p>DoS Defence</p> <p>Dynamic ARP inspection (DAI)</p>

## SOFTWARE FEATURES

	<p>SSH v1/v2          SSL v2/v3/TLSv1          Port Security          Broadcast/Multicast/Unknown-unicast Storm Control</p>
<p>Management</p>	<p>Web-based GUI and CLI management          SNMP v1/v2c/v3, compatible with public MIBs          DHCP/BOOTP Client, DHCP Snooping, DHCP Option82          CPU Monitoring          Port Mirroring          Time Setting: SNTP          Integrated NDP/NTDP feature          Firmware Upgrade: TFTP &amp; Web          System Diagnose: VCT          SYSLOG &amp; Public MIBS</p>

## OTHERS

<p>Certification</p>	<p>CE, FCC, RoHS</p>
<p>Package Contents</p>	<p>POE Switch          Electric Line          Guide Book/Warranty Card</p>
<p>Environment</p>	<p>Working Temperature:          0°C~40°C          Storage temperature :          -40°C~70°C          Working Humidity :          10%~90% RH          non-condensing</p>



## OTHERS

---

	<p>Storage Humidity: 5%~90% RH non-condensing</p>
--	---